



## Log Cabin "DSN" series 3.5×4

Project Dimensions

3.5 × 4 / 12 m<sup>2</sup>

Full house set

**2,375 €**

### Timber



45 mm



65 mm  
+ 535 €

## Project planning



3 500




4 000

11,53  
M<sup>2</sup>

# Разрез



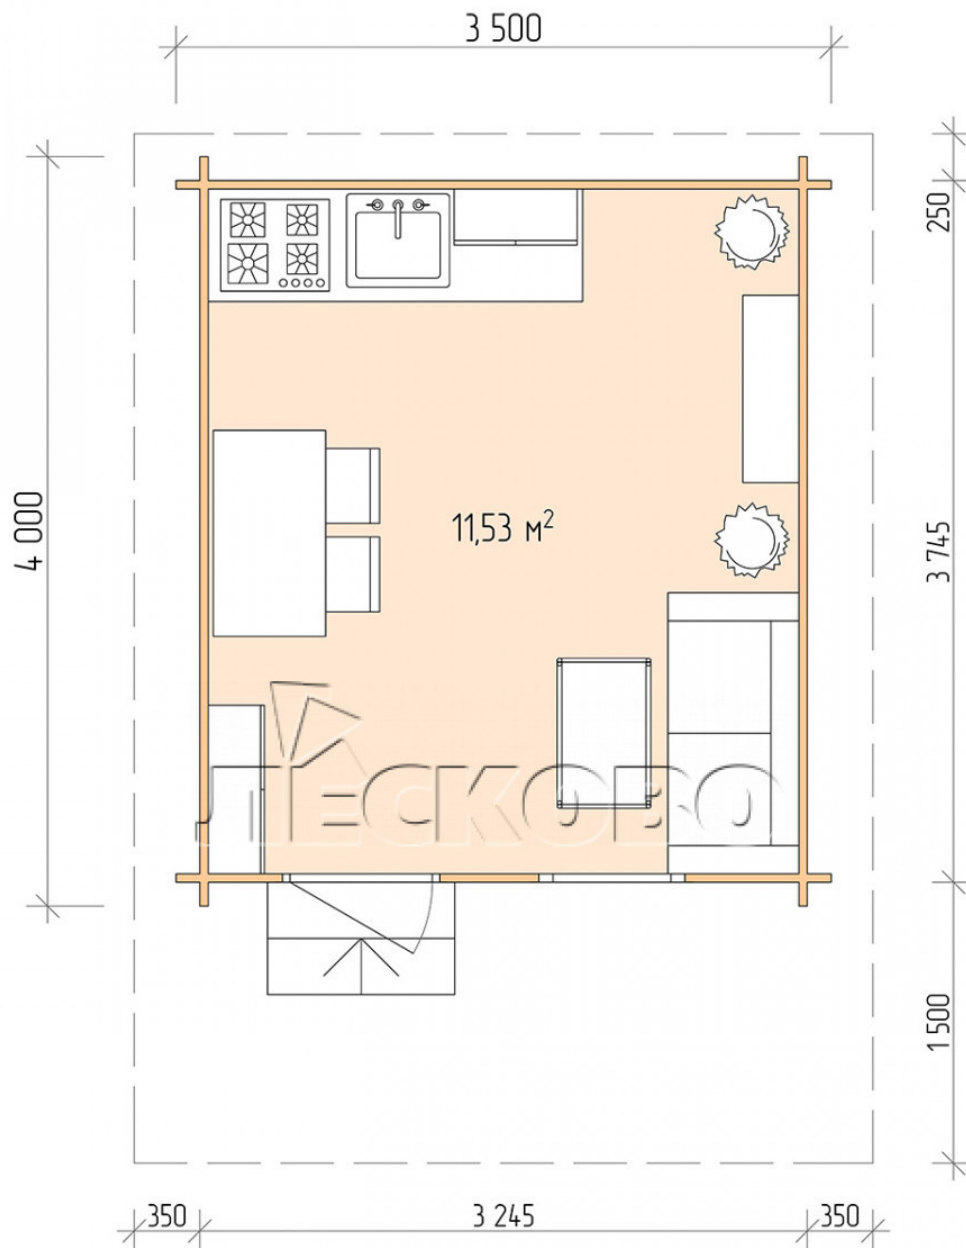

## House Kit

- Wall kit: 44 × 145mm mini-chamber drying chamber with bowls for the project. The material of the tree is spruce, pine (GOST 8486). Humidity 12-14%. The height of the walls is 2.16 m;
- Logs, lower harness: board 45 × 145 mm chamber drying 10-12%;
- Floors: floorboard 35 mm, Chamber drying;
- Ceiling: imitation of a bar 20 × 135 mm, Chamber drying;
- Wooden windows, glass 4 mm, Single. Treatment with a colorless antiseptic. Hardware;



0.87×0.78 м.1 шт.

- Wooden doors;



0.84×1.885 м.

glass.1 шт.

7. Platbands: dry planed board 20 × 100 mm;

8. Roof: shingles.



9. Skirting board 35 mm.

+7 (843) 297-76-60

г. Казань, СНТ им. Воровского, уч. 52